

SIGNATURE NATURALS

Narrow-plank PureForm™ Solid Bamboo Flooring



FINE BAMBOO FLOORING, PANELS & WORKTOPS

Our classic PureForm™ bamboo in our original narrow-plank design comes in Multiple Precise Lengths of 2,3,4 and 6 feet for an intentionally random visual when installed. Featuring a tongue and groove profile for flexible installation. Designed for use in commercial and residential interiors.



FEATURES + BENEFITS

PERFORMANCE

- Durable 7-step UV Cured Polyurethane coating with aluminum oxide wear layer for abrasion resistance
- Premium PureForm bamboo – Averages 40% harder than red oak
- Optimum 5.5 Moso Bamboo: Harvested at maturity for peak density, creating a harder and more stable product for lasting beauty and performance
- Approved for installation over radiant heat flooring systems

VALUE


- Lifetime structural warranty; 10-year heavy-use commercial/25-year residential finish warranties

ECOSMART

- Certified USDA BioPreferred – 99% biobased content

INDOOR AIR QUALITY


- Floorscore certified for superior indoor air quality.
- Qualifies for Collaborative for High Performance Schools 2009 Criteria EQ2.2.3 – Low Emitting Materials

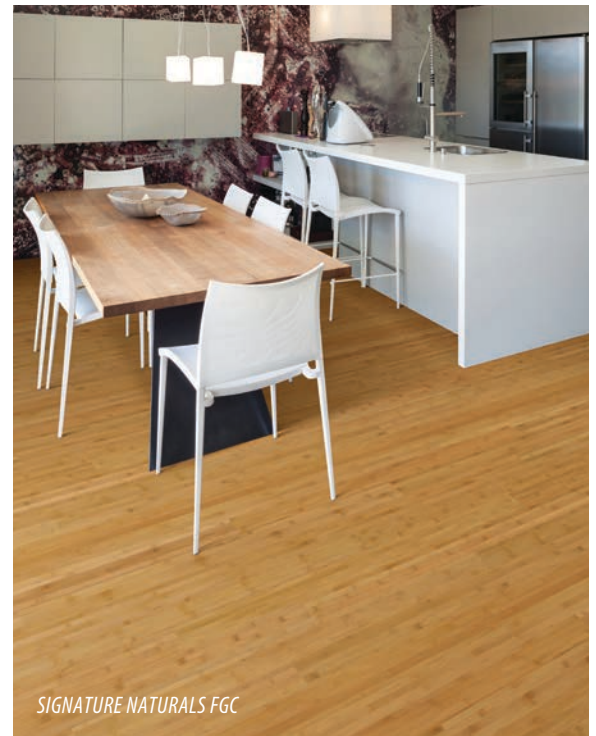

SIGNATURE NATURALS FGC

PRODUCT DETAILS

| | |
|----------------------|--|
| Nominal Dimensions : | 24, 36, 48 & 72.44" x 3.62" x 0.59" 610mm, 920mm, 1220mm & 1840mm x 92mm x 15mm |
| Construction: | Solid PureForm™ Traditional Bamboo |
| Milling: | 4 Side Micro Bevel |
| Profile: | Tongue and Groove |
| Accessories: | Full line of coordinating 15mm accessories |
| Color Variation: | Moderate |




LEED® CREDITS

- IEQ 4.3 Low Emitting Materials
- MR6 Rapidly Renewable Materials
- Certified Wood: MR7 – *available upon request

INSTALLATION + CARE

| | |
|-----------------------------|--|
| Installation Environment: | Nail, Staple and Glue installation into environments having 35-55% RH. Can be installed over radiant heat. |
| Nail & Staple Installation: | On or Above grade. Use vapor retarder over wood subfloor. |
| Glue Installation: | On or Above grade. Use a vapor barrier over cement subfloor OR vapor retarder over wood subfloor. |
| Recommended Adhesive: | Premium Bamboo Flooring Adhesive |
| Nailing Guidelines: | 15-16 gauge cleat or staple 1 1/2"-2" |
| Acclimation: | Minimum of 48 hours on-site in box |
| Maintenance: | TrueClean Floor Cleaner |



Flat Grain
Caramelized